




Key Features:

- Light weight and portable.
- Interchangeable with MFT systems (not matched to a specific Mini Flex Track drilling system).
- Includes Ethernet router for stand-alone command and control, or within a factory/enterprise network environment.
- Small and flexible low-voltage DC umbilical cable that can be up to 80ft (24m) long.

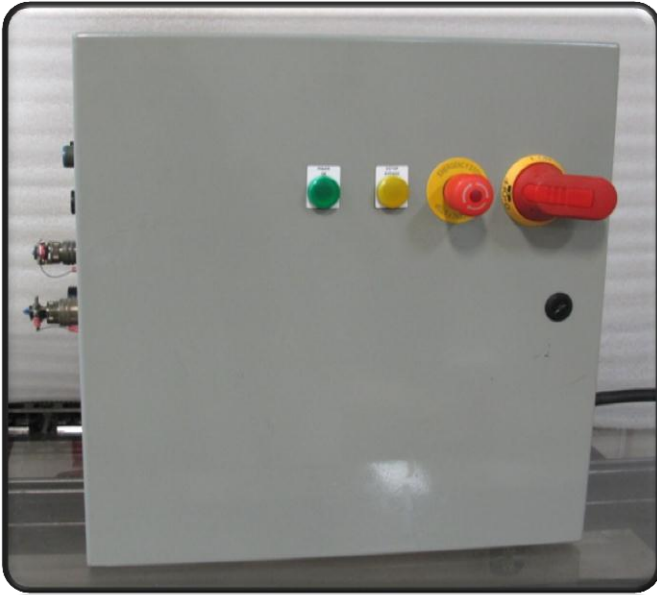

Technical Specifications:

Input power	Universal AC: 85-264VAC, 1-phase 50/60Hz, 15A-30A
Output power	48VDC or 90VDC
Communication interface	Ethernet
Emergency stop	Daisy-chain feature allows E-Stop for single machines or for multiple machines on a master Emergency Stop circuit in the factory.
FOD vacuum	Can be fully automated and under control of machine
Umbilical length to positioning module	Up to 80ft (24m)
Weight	65 lbs (29.5 kg)
Positioning Carriage Size (L x W x H) (without touch screen attached)	24in x 20in x 9in (610mmx508mmx229mm)



For more information, demonstrations, or custom applications please contact a representative to discuss your specific requirements